

MM491G(L)



370 W

150 mm

MAX 500W

Quick sanding belt release
快速砂带涨紧

Angle adjustable work table
(Can be used for both sanding
disc and belt)
可调节角度的工作台 (砂盘和砂带均可使用)



Adjustable Belt
可调整的砂带
Tilt the belt from a horizontal to a
vertical position depending on the
needs of your project.

Cast Iron Base
铸铁底座
The heavy cast iron base prevents
the sanding table from vibrating,
ensuring that the sanding table
sander stays in one place while
sanding.

**Spacious Table with
Miter Gauge**
宽大的工作台带斜切规
The spacious table is accompanied
by a miter gauge that allows the
0 to 45° beveling capabilities and
a removable miter gauge.

Dust Collection Port
集尘器接口
Attach your favorite dust
collector to the 2.5 inch
dust port to minimize clean-up
of saw dust and debris.

**Extended Blade Guard For
Added Safety**
延长的刀片护罩
Our extended blade guard
helps guide excess sanding
dust into the collection spout
while also stopping unwanted
objects such as long hair or
fingers from getting trapped
in the belt. The guard doubles
as a stop for the wood to maximize
control and precision during
operation.

MM493B



125 mm

250 W

5" DISC AND 1"X30" BELT SANDER

Enclosed Induction Motor

封闭式感应马达
Induction motor delivers powerful, quiet, dependable
performance.

感应电动机扭矩强大, 安静, 可靠的性能。

Cast Aluminum Base

铝压铸底座
The cast AL base keeps the sander stable during use,
so you can apply the desired amount of pressure and
achieve consistent results.

铝压铸底座让砂带机在工作时保持稳定, 这样就可以
任意施加压力来得到想要的抛磨效果

Belt fast tracking

砂带快速调整

Cast Al work rest with miter gauge

铸铝工作台带角度规



MM491E



150 mm

370 W

6" DISC AND 4"X36" BELT SANDER



Quick-Replacing The Sander Belt
快速更换砂带



- 1 Raise the sanding bed about 45°; tighten the bed locking screw.
- 2 Pull the tension lever, releasing the tension.

- Quick sanding belt release
- Angle adjustable work table (Can be used for both sanding disc and belt)
- Heavy-duty cast iron Base
- Cast Al work rest with miter gauge
- 快速砂带涨紧
- 可调节角度的工作台 (砂盘和砂带均可使用)
- 重型铸铁底座
- 铸铝工作台带角度规

Technical Data/技术参数

| Model/型号 | Power WATT 功率 | Motor Speed 50Hz / 马达转速 | Disc Size/ 砂盘尺寸 | Belt Size/ 砂带尺寸 | Grit /粒度 | Belt Speed /砂带速度 | Table Tilt/ 工作台角度 | Table Size/ 工作台尺寸 | Disc mm 砂盘 | Belt mm 砂带 | Caron size /铁板尺寸 | Weight 重量 | NW/GW 净重/毛重 | Container load /铁板数 |
|----------|---------------------|----------------------------|--------------------|------------------------|-------------------|---------------------|----------------------|----------------------|---------------|---------------|---------------------|--------------|----------------|------------------------|
| MM493B | 250 | 2980 | 3590 125 5 | 80# 25.4*762 1*30 100# | 14 | 17 | 0-45° | 185*98 | ø148 | ø148 | 446*530*300 | 7.3/8.8 | 650 | 1300 1500 |
| MM491GL | 370 | 2980 | 3590 150 6 | 80# 100*914 4*36 90# | 7.35 8.8 | 8 | 0-45° | 226*160 | NA | NA | 565*280*330 | 16.5/18.0 | 560 | 1120 1270 |
| MM491E | 370 | 2980 | 3590 150 6 | 80# 100*914 4*36 90# | 7.35 8.8 | 8 | 0-45° | 215*146 | NA | NA | 565*320*345 | 20.0/21.5 | 505 | 1008 1008 |
| BD4603 | 450 | 2980 | 3590 150 6 | 80# 100*914 4*36 90# | 9.2 11 | 9.2 | 0-45° | 195*136 | NA | NA | 565*500*250 | 13.3/15.0 | 390 | 820 920 |
| BD4601 | 500 | 2980 | 3590 200 8 | 80# 100*914 4*36 90# | 9.2 11 | 9.2 | 0-45° | 264*150 | 190*160 | 190*160 | 575*515*285 | 15.0/16.5 | 350 | 700 790 |
| BD4800 | 500 | 2980 | 3590 200 8 | 80# 100*914 4*36 90# | 13 | 15.6 | 0-45° | 102*250 | 152*173 | 152*173 | 535*545*405 | 27.0/28.5 | 360 | 720 860 |
| BD4900 | 750 | 2980 | 3590 229 9 | 80# 150*1220 6*48 90# | 8 9.6 | 8 | 0-45° | 332*5120 | NA | NA | 750*455*470 | 30.0/32.5 | 190 | 360 380 |
| BD41000 | 750 | 2980 | 3590 250 10 | 80# 150*1220 6*48 90# | 8 9.6 | 8 | 0-45° | 332*5120 | NA | NA | 750*455*465 | 39.5/42.5 | 190 | 360 380 |
| CH6800BD | 1000 | 2850 | 3450 250 10 | 80# 150*1220 6*48 90# | 11.3 13.5 | 11.3 | 0-45° | 295*5120 | NA | NA | 720*530*345 | 45/49.5 | 193 | 401 451 |
| BD2601 | 370 | 2980 | 3590 150 6 | 80# 51*1087 2*42 90# | 8.5 22 | 8.5 | 0-45° | 204*156 | 226*5170 | 226*5170 | 605*440*280 | 14.5/16.0 | 390 | 760 860 |
| BD1600VS | 550 | 2000- | 2000- 150 6 | 80# 25.4*762 1*30 100# | 8.6-13.7 9.6-16.4 | 8.6-13.7 | 0-45° | 204*156 | ø148 | ø148 | 480*420*335 | 13.5/15.0 | 440 | 900 1000 |
| DS-12B | 900 | 1490 | 1790 305 12 | 80# NA NA NA | NA NA NA | NA NA NA | 0-45° | 417*174 | NA | NA | 480*455*425 | 35.0/37.0 | 300 | 600 730 |
| DS-12D | 800 | 1490 | 1790 305 12 | 80# NA NA NA | NA NA NA | NA NA NA | 0-45° | 438*156 | NA | NA | 480*455*425 | 30.0/32.0 | 300 | 600 730 |
| DS-12F | 800 | 1490 | 1790 305 12 | 80# NA NA NA | NA NA NA | NA NA NA | 0-45° | 417*174 | NA | NA | 480*455*425 | 28.0/30.0 | 300 | 600 730 |
| DS-12G | 800 | 1490 | 1790 305 12 | 80# NA NA NA | NA NA NA | NA NA NA | 0-45° | 405*225 | NA | NA | 480*455*425 | 30.0/32.0 | 240 | 480 576 |

BD4603

150 mm
450 W



200 mm
500 W



BD4801

CE SR[®] C US

DIRECTLY DRIVEN BELT DISC SANDER 马达直驱砂带砂盘机

- Sanding belt and disc were directly driven by a powerful 450w/500w motor, provides power for small and large sanding operations on various materials.
- 砂带和砂盘均为强劲的450瓦/500瓦马达直接驱动，为各种尺寸材料的砂光工作提供动力
- Sanding belt tilts up to 90 degrees vertical, unsupported underside allows for sanding of curved work pieces.
- 砂带可90度直立使用，没有支撑的背面，可以用来打磨有弧度的工件
- No drive belt, No gears, Maintenance-free
- 没有皮带齿轮等传动机构，免维护



- Quick sanding belt release and track
- 快速砂带释放及位置调整



- Angle adjustable work table with miter gauge used on sanding disc
- 可调节的工作台配合砂盘使用



- work table used on sanding belt
- 工作台配合砂带使用



- Separated dust port for both belt and disc sanding.
- 砂带和砂盘部分都有排尘口



- Extra support for belt sanding
- 延长砂带支撑



- Large aluminum table which can adjust from 0-45° degree.
- 0-45° 可调整的宽大铝工作台



- The sturdy cast aluminum base with mounting holes and four rubber feet, provides low vibration and with stability while operating.
- 带固定孔和减橡胶垫的强壮压铸底座，提供更低的震动和更高的稳定性。

BD4800

CE SR[®] C US



8" DISC AND 4"X36" BELT SANDER

Sanding belt and disc were directly driven by motor shaft, no belt, no gears. Maintenance-free
砂带和砂盘均为马达直接驱动，没有皮带齿轮等传动机构，免维护

- Total enclosed motor
- Heavy duty cast iron base
- Automatic dust collection
- Cast Al work table for both sanding belt and disc
- 全封闭马达
- 重型铸铁底座
- 自动集尘
- 砂带和砂盘均配有铝压铸工作台



BD1800

CE SR[®] C US



200 mm

250 W

- Powerful induction motor
- Cast iron belt frame
- Cast iron work rest with miter gauge
- 大功率感应马达
- 铸铁砂带座
- 铸铁工作台带角度规



Two 2" Dust Port

2个集尘口
Features two 2" dust ports for easy connection to a shop vacuum or dust collector.

BD6900

230 mm
750 W



250 mm
750 W



CE

CE

BD61000

SB[®]_{US}

- Powerful induction motor
- Cast AL work table with miter gauge
- Rigid steel base strong, light weight
- Optional stand
- 大功率感应马达
- 带角度的铝压铸工作台
- 坚固的钢板底座，轻量化设计
- 支架可选

CH6900BD

230 mm
1000W



- Belt Operates in Vertical or Horizontal Position
- Quick Release Tension Mechanism for Fast Easy Belt Changes
- Both Belt and Disc Come with Tilting Table, Miter Gauge
- Open Floor Stand
- 砂带部分可在0度或90度打磨
- 快速砂带张紧结构
- 可调节角度工作台，带分度盘（砂盘和砂带均可使用）
- 开放式支架

BD2601

150 mm
370 W



Directly Driven Belt Disc Sander

This belt and disc sander has a 2x42" belt and 6" disc for deburring, beveling and sanding wood, plastic and metal. The belt table tilts 0-60° degree and the disc table tilts 0 to 45 degree for angle sanding. The quick release tension and tracking mechanism makes belt changing quick and easy. Belt plate is removable for contour sanding. Belt housing swivels from horizontal to vertical for sanding long work pieces.

这台砂光机配有2x42寸的砂带和6寸的砂盘，用来去除木材、塑料，金属的毛刺，打磨斜边和砂光表面。砂带工作台可以0-60度调整，砂盘工作台可以0-45度调整。快速张紧和砂带调节机构方便更换和调整砂带。

砂带挡板可以拆卸，用来进行轮廓的打磨。砂带部分可以垂直到水平调节，方便打磨长的工作。

BD1600VS

150 mm
550 W



VARIABLE SPEED BELT DISC SANDER

- Vertical belt sanding with table or workstop
- Sand true, straight edges, end grain and flat surfaces
- Disc sanding with table and miter-gauge
- Sand at any angle with miter-gauge
- Sand flat or angled ends, edges or flat surfaces
- 砂带垂直，配合工作台或者限位板使用
- 打磨直角，端面和平面
- 配合工作台和分度盘使用砂盘进行打磨
- 使用分度盘打磨各种角度
- 打磨平的或者带角度的物料端面，角度或者平面



DS-12B



900 W



- Cast Aluminum work table with miter gauge
- Cast iron TEFC motor
- Heavy duty cast iron frame and base
- In-built dust ex-blower design
- 铝压铸工作台，带分度盘
- 全封闭风冷的铸铁壳马达
- 重型铸铁机身和底座
- 内置的灰尘外排设计



DS-12D



900 W



- Cast Aluminum work table with miter gauge
- Cast iron TEFC motor
- Heavy duty cast iron frame and base
- Disc brake system available
- 铝压铸工作台，带分度盘
- 全封闭风冷的铸铁壳马达
- 重型铸铁机身和底座
- 可选砂盘快速刹车系统

DS-12F
DS-12G



800 W



DS-12G

Disc guard available
可选砂盘防护罩



- Cast Aluminum work table with miter gauge
- Heavy duty cast iron frame and base
- Disc brake system available
- 铝压铸工作台，带分度盘
- 重型铸铁机身和底座
- 可选砂盘快速刹车系统

Orbital Floor Sander 地板抛光机



FS-B

- Auto Dust Collection
- Rectangle sanding
- 自动吸尘
- 矩形砂磨

Floor scraper 铲地板机



FS-A

- Detachable handle
- Cast Al frame, light weight and strong
- 可拆卸的操作杆
- 铝压铸机身，轻便，强壮

Technical Data/技术参数

| Model/型号 | Power/功率 | | Motor speed/ 马达转速 | Working parts/ 工作部件 | | Working parts material/ 工作件材料 | Optional parts/ 可选件 | Feature/ 特性 | Carton size/ 包装尺寸 | Container load/ 装箱数 | | | |
|----------|---------------|---------------------|----------------------|------------------------|---------------------|--|----------------------------|--|--|-----------------------------------|-------|-------|-------|
| | Watts (S1) | Watts (S2 30min) | | 50Hz | 60Hz | | | | | KG | 20 GP | 40 GP | 40 HP |
| FS-A | 180 | 300 | 4450 | 4450 | Blades | 65 Aln Blade | Extension Handle | Orbital Cutting | Tool: 380x164x380 Handle: 1030x210x98 | 12, 17, 13 Handle 2.6 / 3.1 | 650 | 1300 | 1500 |
| FS-B | 1100 | NA | 2980 | 3580 | Sanding Pad & Paper | #80 Al Oxide Paper or Silicon Carbide Net Size: 445x300x25mm | Cleaning Pad & Wire Net | Rectangle Orbital Sanding&Auto Dust Collection | Tool: 535x475x525 Handle: 960x460x135 | 56 / 58 | 145 | 290 | 350 |

GS-A



- Cast iron base
- Large steel table
- Power hook
- 铸铁底座
- 宽大的钢板平台
- 电源线挂钩



Water tank
冷却水槽



GS-B

GS-C

- Cast iron base
- Steel frame
- Water tank/tool box
- Wheel storage
- 铸铁底座
- 钢板机身
- 冷却水槽/工具箱
- 砂轮片储藏位

Height adjustable

高度可调

- Cast iron base
- Large steel table
- Water tank/tool box
- Wheel storage
- 铸铁底座
- 宽大的钢板平台
- 冷却水槽/工具箱
- 砂轮片储藏位



GS-E

With Sheet Metal Work Table and Base DP20013A (DP8A)



With Cast Iron Work Table and Base DP20013 (DP8)

Powerful Induction Motor
大功率感应电机

CROSS LASER

13/16 mm

Three-spoke Feed Handle
三辐把手

Height Adjustment
工作台高度可调

Inbuilt Laser Light
内置激光灯

Table Lock Handle
工作台锁紧把手

Sturdy Cast Iron Base
铁板底座

Safety Guard
钻头防护罩

Steel Work Table
铁板工作台

Metal Base
铁板底座



Precision Laser
激光导视系统



Drilling Depth Adjustment System
钻孔深度可调



Keyed Chuck
13mm/16mm 夹头



Onboard Key Storage
夹头钥匙槽



High Quality Drive Pulley with 5 Step
5速可调

The laser light specifies the exact spot that the bit will travel through for maximum precision during drilling.

The JT33/B16 chuck accepts drill bits up to a 13/16 in size attached key storage to meet the needs of a variety of projects.

Driven pulley made by Nylon or cast Aluminum, low vibration and low noise.

Technical Data/技术参数

| 型号 Model | 高度 Height (mm) | 工作台尺寸 Table Size (mm) | 平台材料 Table Material | 支柱材料 Pipe Material | 底座尺寸 Base Size (mm) | 底座材料 Base Material | 适用砂轮机 Applicable Grinders Size | 砂轮存放盒 Grinding Wheel Storage | 水箱 Water Tank | 可选项 Optional | 净重/毛重 NW/GW (kg) | 包装尺寸 Carton size (mm) | 净重/毛重 NW/GW (kg) | 容器负载 Container load 托盘数 |
|-------------|----------------------|-----------------------------|------------------------|-----------------------|---------------------------|-----------------------|--------------------------------------|------------------------------------|------------------|-----------------|------------------------|-----------------------------|------------------------|-------------------------------|
| GS-A | 812 | 315*250 | 钢板 Steel Metal | 钢管 Steel Pipe | φ478 | 铸铁 Cast Iron | 125mm-250mm | No | 可选配 Optional | 9 / 10 | 630 / 1290 / 1510 | 625*385*125 | 9 / 10 | 630 / 1290 / 1510 |
| GS-B | 812 | 315*250 | 钢板 Steel Metal | 钢管 Steel Pipe | φ478 | 铸铁 Cast Iron | 125mm-250mm | No | 可选配 Optional | 10 / 11 | 630 / 1290 / 1510 | 825*385*125 | 10 / 11 | 630 / 1290 / 1510 |
| GS-C | 760 | 280*170 | 钢板 Steel Metal | 铁皮 Sheet Metal | φ344 | 铸铁 Cast Iron | 125mm-250mm | Yes | Yes | 12 / 13.5 | 385 / 780 / 870 | 815*370*260 | 12 / 13.5 | 385 / 780 / 870 |
| GS-E | 710-910 | 315*250 | 钢板 Steel Metal | 钢管 Steel Pipe | φ478 | 铸铁 Cast Iron | 125mm-250mm | Yes | Yes | 8.2 / 10 | 610 / 1220 / 1400 | 645*555*135 | 8.2 / 10 | 610 / 1220 / 1400 |

Technical Data/技术参数

| Model 型号 | Power 功率 Watt | Max Chuck 最大夹头尺寸 mm | Spindle 主轴行程 mm | Tiger 主轴承速度 mm | No. of 速度数量 | Speed range 速度范围 50Hz | Swing 摆臂直径 mm | Table size 工作台尺寸 mm | Table 工作台面 mm | Com Dia 立柱直径 mm | Base size 底座尺寸 mm | Height 总高度 mm | Carton size 包装尺寸 mm | N.W./G.W. 净重/毛重 kg | Container load 容器负载 托盘数 |
|----------------|---------------------|---------------------------|-----------------------|----------------------|----------------|-----------------------------|---------------------|---------------------------|---------------------|-----------------------|-------------------------|---------------------|---------------------------|--------------------------|-------------------------------|
| DP20013A(DP8A) | 300 | φ13 or φ16 | 50 | JT33/B16 | 5 | 550-2500/750-3000/200 | 8 | 164x162 | 45-0-45 | 46 | 298x90 | 580 | 465x370x240 | 13.5/15.5 | 715 / 1435 / 1755 |
| DP20013 (DP8) | 250 | φ13 or φ16 | 50 | JT33/B16 | 5 | 550-2500/750-3000/200 | 8 | 165x165 | 45-0-45 | 46 | 288x78 | 580 | 460x320x240 | 14.4/15.5 | 630 / 1260 / 1400 |

DP8F



13/16mm
MACHINE HEIGHT
1580mm

CROSS LASER

FLOOR MODEL DRILL PRESS

落地型台钻

- Three-spoke Feed Handle
- Sturdy cast iron base
- Cross laser guided (optional)
- Optional steel or cast iron work table
- 三辐把手
- 稳固的铸铁底座
- 交叉激光指示(可选)
- 可选钢板或铸铁工作台

DP2501A / DP2501B / DP10L

13/16 mm



Optional Plastic Pulley Guard
可选塑料皮带罩



Angle adjustable work table
倾斜的工作台



Precision Laser
交叉激光指示



Inbuilt LED Light
内置LED灯

BENCH TOP DRILL PRESS

桌面型台钻

- Safety guard
- Three-spoke feed handle
- Powerful induction motor
- Cast iron work table angle adjustable
- Rack&pinion for accurate table height adjustments
- Sturdy cast iron base
- NVR switch, safety guard as CE requirement
- Emergency stop as GS requirement
- 电磁开关, 钻头防护罩为CE安规要求
- 急停按钮为GS认证要求

BENCH TOP DRILL PRESS 桌面型台钻

DP25016B

16 mm
12 Speed



Emergency Stop Switch
急停开关

Safety Guard
钻头防护罩

Cast Iron Work Table
铸铁工作台

Sturdy Cast Iron Base
铸铁底座

Powerful Induction Motor
大功率感应电机

Three-spoke Feed Handle
三辐把手

Rack&pinion for accurate table height adjustments
高度通过齿轮齿条调节

DP34016F / DP34016B

16 mm
12 Speed



MACHINE HEIGHT
1610mm

12 Speed

MACHINE HEIGHT
1065mm

12 Speed

- Rack&Pinion for accurate table height adjustments
- Cast iron work table bevel 45° left and right, 360° rotation
- Floor or Bench top
- 高度通过齿轮齿条调节
- 铸铁工作台左右45度可调, 360度旋转
- 可选台式款和立式款

Technical Data/技术参数

| Model 型号 | WWT | Power 功率 | Max Chuck Capacity 最大夹头尺寸 | Spindle 主轴行程 | Taper 主柄锥度 | No. of Speeds 速度数量 | Speed range 速度范围 | Swing 摆幅直径 | Table size 工作台尺寸 | Table 工作角度 | Column 立柱高度 | Base size 底座尺寸 | Machine 机身高度 | Carton size 包装尺寸 | N.W./G.W. 净重/毛重 | Container load 装箱数 |
|-------------|-----|-------------|------------------------------|-----------------|---------------|--------------------------|-----------------------|---------------|---------------------|---------------|----------------|-------------------|-----------------|---------------------|--------------------|-----------------------|
| DP8F | 300 | 300 W | φ13 | 50 | JT33/816 | 5 | 165-2400/155-2850/250 | 10 | 164x165 | 45-0-45 | 48 | 440x200 | 1580 | 1150x300x268 | 32.7/27.0 | 20 GP 140 GP 40 HP |
| DP2501A | 300 | 1550(10mm) | φ13 | 50 | JT33 | 5 | 510-2430/610-2850/250 | 10 | 194x165 | 45-0-45 | 48 | 341x208 | 730 | 620x300x310 | 22.5/24.0 | 378 700 872 |
| DP2501B | 300 | 1550(15mm) | φ16 | 50 | B16 | 5 | 510-2430/610-2850/250 | 10 | 194x165 | 45-0-45 | 48 | 341x208 | 730 | 620x300x310 | 22.5/24.0 | 378 700 872 |
| DP10L | 300 | N/A | φ13 | 50 | JT33 | 5 | 510-2430/610-2850/250 | 10 | 194x165 | 45-0-45 | 48 | 341x208 | 730 | 610x340x300 | 21.5/23.0 | 420 1 903 1 032 |

Technical Data/技术参数

| Model 型号 | WWT | Power 功率 | Max Chuck Capacity 最大夹头尺寸 | Spindle 主轴行程 | Taper 主柄锥度 | No. of Speeds 速度数量 | Speed range 速度范围 | Swing 摆幅直径 | Table size 工作台尺寸 | Table 工作角度 | Column 立柱高度 | Base size 底座尺寸 | Machine 机身高度 | Carton size 包装尺寸 | N.W./G.W. 净重/毛重 | Container load 装箱数 |
|-------------|-----|-------------|------------------------------|-----------------|---------------|--------------------------|-----------------------|---------------|---------------------|---------------|----------------|-------------------|-----------------|---------------------|--------------------|-----------------------|
| DP25016B | 375 | N/A | φ16 | 60 | B16 | 12 | 230-2470/280-3000/250 | 10 | 302x197 | 45-0-45 | 70 | 428x253 | 1610 | 1400x840x245 | 51.0/56.0 | 144 188 320 |
| DP34016F | 375 | N/A | φ16 | 60 | M12 | 12/16 | 180-2740/250-3100/340 | 13 | 250x255 | 45-0-45 | 70 | 428x255 | 1685 | 885x652x277 | 46.0/50.0 | 240 504 567 |
| DP34016B | 375 | N/A | φ16 | 60 | M12 | 12/16 | 180-2740/250-3100/340 | 13 | 250x255 | 45-0-45 | 70 | 428x255 | 1685 | 885x652x277 | 46.0/50.0 | 240 504 567 |



DP15L



16 mm

Professional Choice
专业之选

- 16 Speed for different application
- Industrial goose neck lamp (optional)
- Cross laser guided (optional)
- Dual voltage design
- Sturdy cast iron base
- 16种速度用于钻不同的材料
- 弯管大灯 (可选)
- 交叉激光指示(可选)
- 双电压马达设计
- 稳固的铸铁底座



WOOD



STEEL ALLOY



Professional Choice



20 mm

DP43020F

MACHINE
HEIGHT
1635mm

DP51520

MACHINE
HEIGHT
1700mm



12 Speed



Cast iron hand wheel
铸铁手轮

High Quality Drive Pulley
with 16 speed
高质量的铸轮，带16档调速

- Cast iron main head, work table and base
- 铸铁主头、工作合和底座

DP16R / DP16RA



1-16 mm

SWING

240-420mm

5 Speed Radial Drill Press
5速变径台钻

- This 5-speed radial drill press features variable swing up to 420mm and pivoting heads for drilling at just about any angle.
- Cast iron Base with extension support
- 5 Speeds for different application
- Adjustable swing up to 420mm
- 这款5速变径台钻可以提供420mm的最大钻孔直径，可以在各种角度进行钻孔。
- 铸铁底座带延长支撑
- 5种转速可调
- 旋径可调节至420mm



Technical Data / 技术参数

| Model 型号 | Power 功率 Watts SI | Max Chuck 最大夹头尺寸 mm | Spindle 主轴行程 mm | Taper 锥度 | No. of Speeds 速度数 | Speed range 速度范围 50Hz 60Hz | Swing 摆幅 mm inch | Table size 工作台尺寸 mm inch | Table 工作角度 | Column 立柱直径 mm | Base size 底座尺寸 mm | Height 机座高度 mm | Carbon size 碳盘尺寸 mm | N.W./G.W 净重/毛重 kg | Container load 装箱数 20 GP 40 GP 40 HP | | |
|-------------|----------------------------|---------------------------|-----------------------|-------------|-------------------------|-------------------------------------|---------------------------|-----------------------------------|---------------|----------------------|-------------------------|----------------------|-----------------------------|-------------------------|--|-----|-----|
| DP15L | 750 | φ16 | 102 | B16 | 12 | 165-3040 200-3650 | 15 306x306 | 45-0-45 | 73 | 535x380 | 1650 | 1440x570x320 | 69.0/73.0 | 112 | 224 | 256 | |
| DP43020F | 750 | φ20 | 80 | MT3/MT2 | 16 | 160-3000 200-3630 | 430 17 | 335x335 45-0-45 | 60 | 446x285 | 1635 | 1395x520x445 | 74.0/78.0 | 144 | 288 | 330 | |
| DP51520 | 1100/1500 | φ20 | 120 | MT3 | 12 | 200-1900 240-2400 | 515 20 | 400x600 280-840 | 45-0-45 | 92 | 575x445 | 1700 | 1150x943x310 650x518x313 | 75.0/79.0 53.0/56.0 | 85 | 170 | 190 |
| DP16R | 550 | φ16 | 80 | JT3/MT2 | 5 | 416-2400 500-2920 | 220x230 280-840 | 45-0-45 | 60 | 340x115 | 800 | 900x460x320 | 37.0/40.0 | 224 | 455 | 520 | |
| DP16RA | 550 | φ16 | 80 | JT2/MT2 | 5 | 416-2400 500-2920 | 280-840 φ290 | 45-0-45 | 60 | 420x146 | 1636 | 1420x500x360 | 55.0/58.0 | 144 | 288 | 320 | |

DP10VL / DP10VL2



Mechanical Speed Adjustment
无极调速

Adjust the speed as needed with a simple move of the lever and receive the same power and torque through the entire speed range.

Better Performance Variable Speed Design
性能出众的无极调速设计

- Powerful induction motor
- Variable speed charging , no need open belt cover
- Cross laser guided
- Rack&pinion for accurate table height adjustments
- 大功率感应电机
- 无极调速设计, 调节转速而不需打开皮带罩
- 交叉激光指示
- 高度通过齿轮齿条调节

DP12VL



Mechanical Speed Adjustment
无极调速

Adjust the speed as needed with a simple move of the lever and receive the same power and torque through the entire speed range.

Better Performance Variable Speed Design
性能出众的无极调速设计

- Powerful induction motor
- Variable speed changing , no need open belt cover
- Cross laser guided
- Rack&pinion for accurate table height adjustments
- 大功率感应电机
- 无极调速设计, 调节转速而不需打开皮带罩
- 交叉激光指示
- 高度通过齿轮齿条调节

Better Performance Variable Speed Design
性能出众的无极调速设计

- Powerful induction motor
- Variable speed changing , no need open belt cover
- Cross laser guided
- Rack&pinion for accurate table height adjustments
- 大功率感应电机
- 无极调速设计, 调节转速而不需打开皮带罩
- 交叉激光指示
- 高度通过齿轮齿条调节



Table Roller Extension
工作台可延长
Extend the table roller for up to 17 inches of support for your workpiece.



Optional Plastic Belt Safety Guard
可选塑料皮带罩



Mechanical Speed Adjustment
无极调速
Adjust the speed as needed with a simple move of the lever and receive the same power and torque through the entire speed range.



Better Performance Variable Speed Design
性能出众的无极调速设计

- Variable speed for different application
- Industrial goose nick lamp (optional)
- Cross laser guided (optional)
- Rack&pinion for accurate table height adjustments
- Sturdy cast iron base
- 多种速度用于不同的材料
- 工业大灯 (可选)
- 交叉激光指示(可选)
- 高度通过齿轮齿条调节
- 德国的铸铁底座



Optional Cast Iron Work Table
可选铸铁工作台



In Built LED Light
内置LED灯

Technical Data / 技术参数

| Model 型号 | Power 功率 | Max chuck capacity 最大夹头尺寸 | Spindle travel 主轴行程 | Taper 锥度 | No. of speed 速度数量 | Speed range 速度范围 | Swing 摆幅 | Table size 工作台尺寸 | Table 工作角度 | Column Dia 立柱直径 | Base size 底座尺寸 | Max. Height 最大高度 | Net weight 净重 | N.W./G.W. 净重/毛重 | Container load 装箱数 |
|-------------|-------------|------------------------------|------------------------|-------------|----------------------|-----------------------|-------------|---------------------|---------------|--------------------|-------------------|---------------------|------------------|--------------------|-----------------------|
| DP10VL | 380 | 16mm | 50 | 1:33 | VS | 440-2500/500-3100/250 | 100mm | 194x165 | 45-0-45 | 48 | 341x208 | 730 | 520x420x310 | 22.5/24.0 | 378 |
| DP100AVL | 360/550 | 18mm | 50 | 1:16 | VS | 440-2500/500-3100/300 | 125mm | 194x200 | 45-0-45 | 58.5 | 334x208 | 810 | 620x420x310 | 24.0/26.0 | 378 |
| DP12VL | 550 | 18mm | 80 | 1:16 | VS | 440-2500/500-3100/300 | 150mm | 240x240 | 45-0-45 | 65 | 410x260 | 950 | 750x550x500 | 38.5/41.0 | 250 |
| DP15VL | 750 | 18mm | 102 | 1:16 | VS | 240-2750/280-3300/300 | 150mm | 300x306 | 45-0-45 | 73 | 535x330 | 1650 | 1440x700x320 | 70.0/75.0 | 112 |
| | | | | | | | | | | | | | | | 30 GP 40 GP 40 HP |

SSA16LVRF

New Scroll Saw With Foot Switch
带脚踏开关的台式曲线锯

406 mm

50 Ⅱ

90 W



Flexible LED working light
可旋转的LED工作灯



Blade tension handle
锯条紧把手

Safety Cover
安全防护罩



Flexible dust blower
万向除尘风管

Variable speed control
切削速度可调

Cast AL large working table
角度可调的铝压板大工作台

Foot switch, free your hand when cutting
脚踏开关, 在切割时解放双手

Dust port
外接排尘口

PTO shaft with 3.2 mm chuck accept different kits
带3.2毫米的软轴, 可连接各种附件使用

Miter Gauge
分度盘

Technical Data/技术参数

| | | | | |
|-----------------------------|---------------|-------------|-------------|-------------|
| Model 型号 | SSA16LRF | 70 | 90 | 125 |
| Power 功率 | 90 W | 90 | 125 | 150 |
| Watts SI | S2 30mm | S2 50mm | S2 75mm | S2 100mm |
| Max cutting depth 最大切割深度 | mm at 0° | 50 | 70 | 90 |
| Max cutting size 最大切割面积 | mm at 45° | 50 | 50 | 50 |
| Speed 速度 | SPM | 550-1600 | 550-1600 | 550-1600 |
| Table size 工作台尺寸 | mm | 414x264 | 414x264 | 414x264 |
| Table tilt 工作角度 | ° | 0-45° | 0-45° | 0-45° |
| Blade size 锯条尺寸 | mm | 133x30x5 | 133x30x5 | 133x30x5 |
| Flexible shaft 速度/软轴速度 | RPM | 1650-4800 | 1650-4800 | 1650-4800 |
| Carton size 包装尺寸 | mm | 665x325x405 | 665x325x405 | 665x325x405 |
| N.W./G.W. 净重/毛重 | kg | 12.0 / 13.5 | 12.0 / 13.5 | 12.0 / 13.5 |
| Container load 装箱数 | 20 GP / 40 GP | 335 | 335 | 335 |
| Weight 重量 | kg | 335 | 335 | 335 |

SSA16V



406 mm

50 Ⅱ

90 W



16" SCROLL SAW

- Cast iron base, low vibration
- 406mm cutting capacity
- Variable speed control for cutting wood and plastic
- In-built dust blower
- Table adjustable 0-45°
- Pinless blade holder
- Optional Steel work table
- Optional heavy LDPE covered concrete base
- 铸铁底座, 低振动
- 切削板材直徑度406mm
- 切削速度可調用于切割木材或塑料
- 内置风管
- 可調0-45°工作角度
- 可使用无销锯条
- 可选钢板工作台
- 可选塑膠混凝土底座



SSA16LV



406 mm

50 Ⅱ

90 W



16" SCROLL SAW WITH LIGHT

- Optional LED light (Flexible or Fix)
- 12V/10W Flexible working light
- Cast iron base, low vibration
- 406mm cutting capacity
- Variable speed control for cutting wood and plastic
- In-built dust blower
- Table adjustable 0-45°
- Pinless blade holder
- 可选LED灯, 带管式或者固定式
- 可灵活转动的12伏/10瓦白光灯
- 铸铁底座, 低振动
- 切削板材直徑度406mm
- 切削速度可調用于切割木材或塑料
- 内置风管
- 可調0-45°工作角度
- 可使用无销锯条



SSA16A

406 mm

50

90 W

16" SCROLL SAW WITH LIGHT

- Optional LED light (Flexible or Fix)
- 12V/10W Flexible working light
- Cast iron base low vibration
- 406mm cutting capacity
- Variable speed control for cutting wood and plastic
- In-built dust blower
- Table adjustable 0-45°
- Pinless blade holder
- Change the blade quickly with holder and side cover handles
- 可选LED灯，弯管式或者固定式
- 可灵活转动的12伏/10瓦白炽灯
- 铸铁底座，低振动
- 切割板材厚度406mm
- 切割速度可调节用于切割木材或塑料
- 带鼓风机
- 工作台角度可调
- 可使用无销锯条
- 可用把手快速更换锯条



Optional LED light
(Flexible or Fix)
可选LED灯，弯管式或者固定式



SSA16LVR

406 mm

50



125 W

16" SCROLL SAW WITH PTO SHAFT

- Flexible lamp
- PTO shaft
- Cast iron base low vibration
- 406mm cutting capacity
- Variable speed control for cutting wood and plastic
- In-built dust blower
- Table adjustable 0-45°
- Pinless blade holder
- 弯管灯
- 可连接多功能软轴
- 铸铁底座，低振动
- 切割板材厚度406mm
- 切割速度可调节用于切割木材或塑料
- 带鼓风机
- 工作台角度可调
- 可使用无销锯条



Technical Data/技术参数

| Model/ 型号 | WATT | | Max cutting depth 最大切割深度 mm at 0° mm at 45° | Max cutting size 最大可锯单位 inch | S.P.M | Table size 工作台尺寸 mm | Table tilt 工作台角度 ° | Blade size 刀片长度 mm | Flexible shaft 变速软轴长度 RPM | Carton size 包装尺寸 mm | N.W / G.W 净重/毛重 kg | Container load 装箱数 | | |
|--------------|-------------|----------|---|------------------------------------|----------|---------------------------|--------------------------|--------------------------|---------------------------------|---------------------------|--------------------------|-----------------------|-------|-----|
| | 功率 Watts | 功率 SI | | | | | | | | | | 20 GP | 40 GP | |
| SSA16V | 70 | 90 | 50 | 20 | 550-1600 | 414x254 | 0-45° | 133x30x5 | N/A | 665x325x380 | 10.5 / 12.0 | 350 | 730 | 845 |
| SSA16A | 70 | 90 | 50 | 20 | 550-1600 | 414x254 | 0-45° | 133x30x5 | N/A | 665x325x380 | 11.0 / 12.5 | 335 | 660 | 720 |
| SSA16LV | 70 | 90 | 50 | 20 | 550-1600 | 414x254 | 0-45° | 133x30x5 | N/A | 665x325x405 | 11.0 / 12.5 | 335 | 660 | 720 |

Technical Data/技术参数

| Model/ 型号 | WATT | | Max cutting depth 最大切割深度 mm at 0° mm at 45° | Max cutting size 最大可锯单位 inch | S.P.M | Table size 工作台尺寸 mm | Table tilt 工作台角度 ° | Blade size 刀片长度 mm | Flexible shaft 变速软轴长度 RPM | Carton size 包装尺寸 mm | N.W / G.W 净重/毛重 kg | Container load 装箱数 | | |
|--------------|-------------|----------|---|------------------------------------|----------|---------------------------|--------------------------|--------------------------|---------------------------------|---------------------------|--------------------------|-----------------------|-------|-----|
| | 功率 Watts | 功率 SI | | | | | | | | | | 20 GP | 40 GP | |
| SSA16LVR | 70 | 90 | 50 | 20 | 550-1600 | 414x254 | 0-45° | 133x30x5 | 1650-1800 | 665x325x405 | 11.0 / 13.0 | 335 | 660 | 720 |

VS4005A

406 mm

50


90 W



16" SCROLL SAW WITH HANDLE

- Flexible lamp
- Cast iron base, low vibration
- 405mm cutting capacity
- Blade quick changing system
- Variable speed control for cutting wood and plastic
- In-built dust blower
- Table adjustable 0-45°
- Pinless blade holder
- 雾灯灯
- 铸铁底座，低振动
- 切割板材直径405mm
- 锯条快速更换系统
- 切割速度可调节用于切割木材或塑料
- 带鼓风管
- 工作台角度可调
- 可使用无销锯条

Blade quick changing system
锯条快速更换系统



Variable Speed Design
无极调速设计



Handle on frame for easy movement
带提手，方便移动



SSA18V

456 mm

50

120 W

18" SCROLL SAW

- Cast iron base, low vibration
- 456mm cutting capacity
- Variable speed control for cutting wood and plastic
- In-built dust blower
- Table adjustable 0-45°
- Pinless blade holder
- 铸铁底座，低振动
- 切割板材直径456mm
- 切割速度可调节用于切割木材或塑料
- 带鼓风管
- 工作台角度可调
- 可使用无销锯条



SSA18LV

456 mm

50

120 W

18" SCROLL SAW WITH LIGHT

- Flexible lamp
- Cast iron base, low vibration
- 456mm cutting capacity
- Variable speed control for cutting wood and plastic
- In-built dust blower
- Table adjustable 0-45°
- Pinless blade holder
- 雾灯灯
- 铸铁底座，低振动
- 切割板材直径456mm
- 切割速度可调节用于切割木材或塑料
- 带鼓风管
- 工作台角度可调
- 可使用无销锯条



Cast Iron work table low vibration
低振动的铸铁工作台

Technical Data 技术参数

| Model 型号 | Power 功率 | Max cutting depth 最大切割深度 | Max cutting size 最大切割半径 | S.P.M 速度范围 | Table size 工作台尺寸 | Table tilt 工作台角度 | Blade tilt 锯条角度 | Flexible shaft 速度/转速 | Carton size 包装尺寸 | N.W / G.W 净重/毛重 | Container load 装箱数 |
|-------------|-------------|-----------------------------|----------------------------|---------------|---------------------|---------------------|--------------------|-------------------------|---------------------|--------------------|-----------------------|
| VS4005A | 70 | 90 | 20 | 406 | 16 | 550-1600 | 41x224 | 0-45° | 133x3x0.5 | N/A | 20 GF 40 GF 40 HP |
| | Watts SI | Watts SI | mm at 0° mm at 45° | mm | mm | RPM | RPM | mm | mm | kg | 335 690 720 |

SSA18LVR

456 mm

50 mm

120 W



FLEXIBLE SHAFT
软轴

18" SCROLL SAW WITH PTO SHAFT

- Flexible lamp
- Cast iron base ,low vibration
- 456mm cutting capacity
- Variable speed control for cutting wood and plastic
- In-built dust blower
- Table adjustable 0-45°
- Pinless blade holder
- 等管灯
- 铸铁底座，低振动
- 切割板材直径456mm
- 切割速度可调用于切割木材或塑料
- 带鼓风管
- 工作台角度可调
- 可使用无销锯条



Technical Data 技术参数

| Model/ 型号 | Power 功率 | | Max cutting depth 最大切割深度 | Max cutting size 最大切割半径 | Speed 速度范围 | S.M.M | Table size 工作台尺寸 | Table tilt 工作角度 | Blade size 锯条尺寸 | Flexible shaft 插轴 | Carion size 包装尺寸 | N.W./G.W 净重/毛重 | Container load 装箱数 | | | | |
|--------------|-------------|----------------|-----------------------------|----------------------------|---------------|-------|---------------------|--------------------|--------------------|----------------------|---------------------|-------------------|-----------------------|-----------|-----|-----|-----|
| | Watts SI | Watts SI | | | | | | | | | | | | | | | |
| SSA18V | 70 | 120 (S2 10min) | NA | 50 | 20 | 456 | 18 | 500-1600 | 262x490 | -10~45° | 133x3x0.5 | N/A | 785x380x385 | 17.0/19.5 | 270 | 540 | 540 |
| SSA18LV | 70 | 120 (S2 10min) | NA | 50 | 20 | 456 | 18 | 500-1600 | 262x490 | -10~45° | 133x3x0.5 | N/A | 785x380x385 | 17.0/19.5 | 270 | 540 | 540 |
| SSA18LVR | 70 | 120 (S2 10min) | NA | 50 | 20 | 456 | 18 | 500-1600 | 262x490 | -10~45° | 133x3x0.5 | 1655~4800 | 785x380x385 | 17.5/20.0 | 270 | 540 | 540 |
| SSA18LVRF | 70 | 120 (S2 10min) | NA | 50 | 20 | 456 | 18 | 500-1600 | 262x490 | -10~45° | 133x3x0.5 | 1655~4800 | 785x380x385 | 18.0/20.5 | 270 | 540 | 540 |

BS0802 / BS0902

195 mm

80 mm

228 mm

89 mm

Blade Tension Adjustment
锯条张紧调节



8" / 9" BAND SAW

- 250W motor rotates
- Create cuts up to 80/89mm deep and 195/228mm wide
- Uses 1400/1511mm blades from 3.5 to 12mm in size
- Large 313 x302mm cast aluminum work table bevels up to 45 degrees
- Includes a 6.35/6.5mm wide blade, a 28/63.5mm dust port, a rip fence, a miter gauge
- 250W电机驱动
- 切割深度达到80/89mm，切割宽度达到195/228mm。
- 使用标准的1400/1511mm锯条，宽度范围3.5-12mm
- 宽大的铝压铸工作台，尺寸313x 302mm，可0-45° 倾斜。
- 机器包括一条6.35/6.5mm 宽度的锯条，一个外径28/63.5mm的排尘口，分度盘，靠尺。

Technical Data 技术参数

| Model / 型号 | BS0802 | BS0902 |
|--------------------------------------|--------------------------|-------------------------|
| Motor S1 / 马达功率 | 250 W | 250 W |
| Motor Speed / 马达速度 | 1400 min ⁻¹ | 1400 min ⁻¹ |
| Table Size / 工作台尺寸 | 300x300 mm / 313x302 mm | 300x300 mm / 313x302 mm |
| Table Tilt / 工作台倾斜角度 | 0-45° | 0-45° |
| Table Extension / 工作台延伸 | No | No |
| Table Material / 工作台材质 | Sheet metal or Aluminum | Sheet metal or Aluminum |
| Cutting Capacity / 切割容量 | 195 mm | 228 mm |
| Max. Cutting height / 最大切割高度 | 80 mm | 89 mm |
| Blade Size / 锯条尺寸 | 1400x6.35x0.35 mm 6(TPI) | 1511x6.5x0.35 mm 6(TPI) |
| Optional Blade width / 可选锯条宽度 | 3.5-12 mm | 3-5-12 mm |
| Blade Speed 50Hz / 锯条转速 50Hz | 960 min/min | 630 min/min |
| Dust Port / 排尘口尺寸 | 28 mm | 63.5mm |
| Work Light / 工作灯 | Optional | Optional |
| Rip Fence / 靠尺 | Optional | Optional |
| Guide Release Blade Tension / 松开锯条张紧 | No | Optional |
| Miter Gauge included / 分度盘 | No | Optional |
| Band Saw Stand / 支架 | No | No |
| Package Size / 包装尺寸 | 715*385*315 mm | 790*450*300 mm |
| Net/Gross Weight / 净重/毛重 | 17 / 18.3 kg | 18.5 / 20.5 kg |
| Container Load 20GP / 装箱数 | 329 | 245 |
| Container Load 40GP / 装箱数 | 651 | 504 |
| Container Load 40HP / 装箱数 | 744 | 576 |



BS1001



100 mm

240 mm

Impressive cutting height of 100mm.
最大切削高度100mm



Technical Data / 技术参数

| Model / 型号 | BS1001 single speed | BS1003 double speed | BS1004 single speed | BS1005 double speed |
|--------------------------------------|------------------------|------------------------|------------------------|------------------------|
| Motor S1 / 马达功率 S1 | 370 W | 1400 min* | 600 W | 800 W |
| Motor Speed / 马达速度 | 1400 min* | 313x302 mm | 1400 min* | 1400 min* |
| Table Size / 工作台尺寸 | 313x302 mm | 335x340 mm | 548x400 mm | 548x400 mm |
| Table Tilt / 工作台倾斜角度 | 0-45° | No | 0-45° | 0-45° |
| Table Extension / 工作台延伸 | No | Aluminum | No | No |
| Table Material / 工作台材质 | Aluminum | 240 mm | Cast Iron | Cast Iron |
| Cutting Capacity / 切削深度 | 240 mm | 100 mm | 305 mm | 305 mm |
| Max. Cutting Height / 最大切削高度 | 100 mm | 1712x9.5x0.35mm | 206 mm | 206 mm |
| Blade Size / 锯条尺寸 | 3.5-12 mm | 1712x9.5x0.35mm | 2360x12.7x0.5 mm | 2360x12.7x0.5 mm |
| Optional Blade width / 可选锯条宽度 | 3.5-12 mm | 730, 950, 1140 mm | 3-16 mm | 3-16 mm |
| Blade Speed 50Hz / 锯条转速 50Hz | 730, 950, 1140 m/min | 730, 950, 1140 m/min | 370 - 750 m/min | 370 - 750 m/min |
| Blade Speed 60Hz / 锯条转速 60Hz | 870, 1140, 1410 m/min | 870, 1140, 1410 m/min | 440 - 900 m/min | 440 - 900 m/min |
| Dust Port / 吸尘口尺寸 | 99 mm, 62 mm, 47 mm | 99 mm, 62 mm, 47 mm | 95 mm | 95 mm |
| Work Light / 工作灯 | Optional | Optional | Optional | Optional |
| Rip Fence / 导尺 | Yes | Yes | Yes | Yes |
| Blade Guides / 锯条导引 | Three Bearings | Three Bearings | Three ball Bearings | Three ball Bearings |
| Quick-Release Blade Tension / 快速锯条张紧 | Yes | Yes | Yes | Yes |
| Miter Gauge Included / 分度盘 | Yes | Yes | Yes | Yes |
| Band Saw Stand / 支架 | Yes | Yes | Yes | Yes |
| Package Size / 包装尺寸 | 880*390*490 mm | 880*390*490 mm | 1150*620*430 mm | 1150*620*430 mm |
| Net/Gross Weight / 净重 | 37 / 40 kg | 37 / 40 kg | 80.0 / 86.0 kg | 80.0 / 86.0 kg |
| Container Load 20GP / 底托数 | 152 | 152 | 90 | 90 |
| Container Load 40GP / 底托数 | 292 | 292 | 180 | 180 |
| Container Load 40HP / 底托数 | 395 | 395 | 214 | 214 |

10" BAND SAW

- Sturdy cast-AL table tilting from 0° to 45°
- 3-bearing precision guiding above and below the table
- Balanced band wheels with rubber facing
- Quick-clamping lever for saw blade
- Working table extension
- Blade tension indication
- LED work light(optional)
- Quick door open system
- 坚固的铝压铸工作台，0-45度可调
- 平衡过的锯轮，胶圈经过精床加工，运作平顺
- 快速锯条张紧
- 工作台可延伸
- LED灯 (可选)
- 快速开门装置

BS1201



305 mm

206 mm

Impressive cutting height of 205 mm.
最大切削高度205mm



Leg stand with wheel kit included. Note the convenient pull out handle for easy manoeuvrability.

12" BAND SAW

- Unique variable drive adjustable
- Sturdy cast-iron table tiltable from -8° to +45°
- 3-roller precision guiding above and below the table
- Balanced and grinded band wheels with rubber facing
- Quick-clamping lever for saw blade
- Precision rip fence with magnified scale which can be set on both left and right of saw blade
- Leg stand with wheel kit included
- 天级调速设计
- 坚固的铸铁工作台，可以从-8调整到45度
- 锯轮经过动平衡和磨床加工
- 快速锯条张紧
- 精确的带放大镜的靠棚可以在单条左面或右面使用
- 包括支架腿和轮子

Technical Data / 技术参数

| Model / 型号 | BS1200 | BS1201 |
|--------------------------------------|---------------------|---------------------|
| Motor S1 / 马达功率 S1 | 800 W | 800 W |
| Motor Speed / 马达速度 | 1400 min* | 1400 min* |
| Table Size / 工作台尺寸 | 548x400 mm | 548x400 mm |
| Table Tilt / 工作台倾斜角度 | 0-45° | 0-45° |
| Table Extension / 工作台延伸 | No | No |
| Table Material / 工作台材质 | Cast Iron | Cast Iron |
| Cutting Capacity / 切削深度 | 305 mm | 305 mm |
| Max. Cutting Height / 最大切削高度 | 206 mm | 206 mm |
| Blade Size / 锯条尺寸 | 2360x12.7x0.5 mm | 2360x12.7x0.5 mm |
| Optional Blade width / 可选锯条宽度 | 3-16 mm | 3-16 mm |
| Blade Speed 50Hz / 锯条转速 50Hz | 370, 800 m/min | 370 - 750 m/min |
| Blade Speed 60Hz / 锯条转速 60Hz | 440, 900 m/min | 440 - 900 m/min |
| Dust Port / 吸尘口尺寸 | 95 mm | 95 mm |
| Work Light / 工作灯 | Optional | Optional |
| Rip Fence / 导尺 | Yes | Yes |
| Blade Guides / 锯条导引 | Three ball Bearings | Three ball Bearings |
| Quick-Release Blade Tension / 快速锯条张紧 | Yes | Yes |
| Miter Gauge Included / 分度盘 | Yes | Yes |
| Band Saw Stand / 支架 | Yes | Yes |
| Package Size / 包装尺寸 | 1150*620*430 mm | 1150*620*430 mm |
| Net/Gross Weight / 净重 | 68.0 / 74.0 kg | 80.0 / 86.0 kg |
| Container Load 20GP / 底托数 | 90 | 90 |
| Container Load 40GP / 底托数 | 180 | 180 |
| Container Load 40HP / 底托数 | 214 | 214 |

BS1501



250 mm

375 mm



Two speeds for the most varying materials



Sturdy cast-iron table tiltable from -8° to +45°



3-roller precision guiding above and below the table



Cast Aluminum miter gauge

Technical Data/技术参数

| | |
|------------------------------------|-----------------------|
| Model/型号 | BS1501 |
| Motor S1/马达功率 | 1500 W |
| Motor Speed/马达速度 | 1400 rpm ¹ |
| Table Size/工作台尺寸 | 548x400 mm |
| Table Tilt/工作台倾斜角度 | -17°~+45° |
| Table Extension/工作台延伸 | No |
| Table Material/工作材料 | Cast Iron |
| Cutting Capacity/切削深度 | 250 mm |
| Max. Cutting Height/最大切削高度 | 2895x1217x0.6 mm 4TPI |
| Blade Size/锯条尺寸 | 6-25 mm |
| Optional Blade width/可选锯条宽度 | 700/1000 mm/min |
| Blade Speed 50Hz/锯条转速 50Hz | 980/1200 mm/min |
| Blade Speed 60Hz/锯条转速 60Hz | 95 mm |
| Dust Port/排出口尺寸 | Optional |
| Work Light/工作灯 | Yes |
| Rip Fence/英尺 | Yes |
| Blade Guides/锯条导轨 | Three Ball Bearings |
| Quick-Release Blade Tension/快速释放锯条 | Yes |
| Miter Gauge Included/分度盘 | Yes |
| Band Saw Stand/底座 | Yes |
| Package Size/包装尺寸 | 1390*710*470 mm |
| Net/Gross Weight/毛净重 | 106/114 kg |
| Container Load 20GP/底座载重 | 48 |
| Container Load 40GP/底座载重 | 96 |
| Container Load 40HP/底座载重 | 96 |

15" BAND SAW

- 2 speed design
- Sturdy cast-iron table tiltable from -17° to +45°
- 3-roller precision guiding above and below the table
- Balanced and grinded band wheels with rubber facing
- Quick-clamping lever for saw blade
- Precision rip fence with magnified scale which can be set both on the left and right of saw blade
- Leg stand with wheel kit included
- 双速设计
- 坚固的铸铁工作台，可以从-17度调整到45度
- 上下都有3个精确的导轮
- 锯轮经过动平衡和磨床加工
- 快速锁紧锯条
- 精确的带放大的靠规可以在锯条左面或右面使用
- 包括支架脚轮和轮子

TS-315AE



315 mm

83 mm

TABLE LENGTH EXTENSION (STANDARD) 延伸工作台



Table length extension can be installed right side 延伸工作台可以安装到右侧



Optional retractable leg 可选伸缩腿结构

12" TABLE SAW

IDEAL FOR SAWING SOLID TIMBERS, BOARDS AND OTHER WOOD-LIKE MATERIALS IN THE WORKSHOP AND AT THE CONSTRUCTION SITES. THEIR GENEROUS SPECIFICATION FULFILLS THE NEED FOR RIPPING, CROSSCUTTING, ANGLE AND COMPOUND ANGLE CUTS.

适用于切割木方、板材和其他类似木材的材料。可以在工作间和建筑工地使用。该台锯的参数可以满足纵切、横切、切斜角和复合角切割。

- Powerful 2800 watts (2000 watt - 230 V) induction motor
- Long Life TCT blade - 315 mm
- Sturdy, powder-coated sheet steel design and galvanized table-top
- Table length extension (could be used also as table width extension)
- Suction guard with suction hose
- Height adjustment of saw blade continuously adjustable by a hand wheel
- 2 handles and wheels for easy transport
- Sturdy parallel guide/ripping fence
- Optional free assembly retractable legs for easy handling and storage

- 强劲的2.0kw-2.8kw的感应马达
- 长寿的315毫米TCT刀片
- 坚固的、喷粉涂层设计和镀锌工作台
- 带延伸工作台(也可以用作侧面辅助工作台)
- 吸尘护罩和吸尘管
- 锯片高度可以连续使用手轮调节
- 2个把手和脚轮方便搬运
- 可选免组装伸缩腿设计便于搬运和存放

Technical Data/技术参数

| | |
|-------------------------------|--|
| Model/型号 | TS-315AE |
| Motor/马达功率 | 230V/50Hz, S8 40%; 2000W 400V/50Hz, S8 40%; 2800W |
| Motor Speed/马达速度 | 2800 RPM |
| Saw blade size/锯片尺寸 | 315x30x2.5 mm |
| Table Size/工作台尺寸 | 800x650 mm |
| Table Height/工作台高度 | 800 mm |
| Extension table size/延伸工作台尺寸 | 800x400 mm |
| Cutting table range/切削角度 | 0~45° |
| Cutting depth at 90°/切削深度 | 83 cm |
| Cutting depth at 45°/切削深度 | 49 cm |
| Sliding table adjustable/滑台角度 | N/A |
| Sliding table guide rail/滑轨导轨 | N/A |
| Package Size/包装尺寸 | 890x610x460 mm |
| Net/Gross Weight/毛净重 | 230V/441.60 kg 400V/471.62 kg |
| Container Load 20GP/底座载重 | 110 |
| Container Load 40GP/底座载重 | 225 |
| Container Load 40HP/底座载重 | 225 |

TS-315BE



TABLE LENGTH EXTENSION
(STANDARD) 延伸工作台



SLIDING TABLE EXTENSION
(STANDARD) 滑台



12" TABLE SAW

Technical Data/技术参数

| | |
|-------------------------------|--|
| Model/型号 | TS-315BE |
| Motor/马达功率 | 230V/50Hz, S6 40%, 2000W 400V/50Hz, S6 40%, 2800W |
| Motor Speed/马达速度 | 2800 RPM |
| Saw blade size/锯片尺寸 | 315x30x2.5 mm |
| Table Size/工作台尺寸 | 800x550 mm |
| Table Height/工作台高度 | 800 mm |
| Extension table size/延伸工作台尺寸 | 800x400 mm |
| Cutting tilting range/切削角度 | 0-45° |
| Cutting depth at 90°/切削深度 | 83 cm |
| Cutting depth at 45°/切削深度 | 49 cm |
| Sliding table adjustable/滑台角度 | 0-45° |
| Sliding table guide rail/滑轨导轨 | 960 |
| Package Size/包装尺寸 | 890x610x460 mm |
| Net/Gross Weight/毛净重 | 230V: 53 / 58 kg 400V: 57 / 61 kg |
| Container Load 20GP/集装箱 | 110 |
| Container Load 40GP/集装箱 | 225 |
| Container Load 40HP/集装箱 | 225 |

- Sliding table carriage standard
- Powerful 2800 watts (2000 watt – 230 V) induction motor
- Long Life TCT blade – 315 mm
- Sturdy, powder-coated sheet steel design and galvanized table-top
- Table length extension (could be used also as table width extension)
- Suction guard with suction hose
- Height adjustment of saw blade continuously adjustable by a hand wheel
- 2 handles and wheels for easy transport
- Sturdy parallel guide/ripping fence
- 标配滑动工作台
- 强劲的2.0kw-2.8kw的感应马达
- 长寿命的315毫米TCT 锯片
- 坚固的、喷粉钣金设计和镀锌工作台
- 带延伸工作台(也可以用作侧面辅助工作台)
- 吸尘护罩和吸尘管
- 锯片高度可以连续使用手轮调节
- 2个把手和脚踏轮方便搬运
- 牢固的导向规范和靠山

TS-315DE



TABLE LENGTH EXTENSION
(STANDARD) 延伸工作台



SLIDING TABLE EXTENSION
(STANDARD) 滑台



12" TABLE SAW

Technical Data/技术参数

| | |
|-------------------------------|--|
| Model/型号 | TS-315DE |
| Motor/马达功率 | 230V/50Hz, S6 40%, 2000W 400V/50Hz, S6 40%, 2800W |
| Motor Speed/马达速度 | 2800 RPM |
| Saw blade size/锯片尺寸 | 315x30x2.5 mm |
| Table Size/工作台尺寸 | 800x550 mm |
| Table Height/工作台高度 | 800 mm |
| Extension table size/延伸工作台尺寸 | 800x400 mm |
| Cutting tilting range/切削角度 | 0-45° |
| Cutting depth at 90°/切削深度 | 83 cm |
| Cutting depth at 45°/切削深度 | 49 cm |
| Sliding table adjustable/滑台角度 | 0-45° |
| Sliding table guide rail/滑轨导轨 | 960 |
| Package Size/包装尺寸 | 890x610x460 mm |
| Net/Gross Weight/毛净重 | 230V: 57 / 63 kg 400V: 60 / 65 kg |
| Container Load 20GP/集装箱 | 110 |
| Container Load 40GP/集装箱 | 225 |
| Container Load 40HP/集装箱 | 225 |

- Sliding table carriage and side table standard
- Powerful 2800 watts (2000 watt – 230 V) induction motor
- Long Life TCT blade – 315 mm
- Sturdy, powder-coated sheet steel design and galvanized table-top
- Table length extension (could also be used as table width extension)
- Suction guard with suction hose
- Height adjustment of saw blade continuously adjustable by a hand wheel
- 2 handles and wheels for easy transport
- Sturdy parallel guide/ripping fence
- 标配滑动工作台和侧面辅助工作台
- 强劲的2.0kw-2.8kw的感应马达
- 长寿命的315毫米TCT 锯片
- 牢固的、喷粉钣金设计和镀锌工作台
- 带延伸工作台(也可以用作侧面辅助工作台)
- 吸尘护罩和吸尘管
- 锯片高度可以连续使用手轮调节
- 2个把手和脚踏轮方便搬运
- 牢固的导向规范和靠山

TS-500A



150

TABLE LENGTH EXTENSION
(STANDARD) 延伸工作台

SLIDING TABLE EXTENSION
(STANDARD) 滑台

Approved BG pendulum saw guard (Standard) BG摆锤设计锯片护罩



Foldable legs 折叠腿

20" TABLE SAW

- Foldable legs for easy handling and storage.
- Sliding table carriage and side table standard
- There is an approved BG pendulum saw guard that protects the user, adhering to the highest safety
- Powerful 4200 watts induction motor
- Long Life TCT blade - 500 mm
- Sturdy, powder-coated sheet steel design and galvanized table-top
- Table length extension (could also be used as table width extension)
- Suction guard with suction hose
- Height adjustment of saw blade continuously adjustable by a hand wheel
- 2 handles and wheels for easy transport.
- Sturdy parallel guide/ripping fence
- 折桌腿方便搬运和储藏
- 标配滑动工作台和侧面辅助工作台
- BG摆锤设计的锯片护罩最大程度确保使用者的安全
- 强劲的4200W的感应马达
- 长寿命的500毫米TCT锯片
- 牢固的、喷粉合金设计和镀锌工作台
- 带延伸工作台(他也可以用作侧面辅助工作台)
- 吸尘护罩和吸尘管
- 锯片高度可以连续使用手轮调节
- 2个把手和脚轮方便搬运
- 牢靠的导向滚和靠脚

Technical Data/技术参数

| | |
|-------------------------------|------------------------|
| Model/型号 | TS-500A |
| Motor/马达功率 | 400V/50Hz/SS 40%/4200W |
| Motor Speed/马达速度 | 2800 RPM |
| Saw blade size/锯片尺寸 | 500x30x4.2mm |
| Table Size/工作台尺寸 | 1000x660 mm |
| Table Height/工作台高度 | 850 mm |
| Extension table size/延伸工作台尺寸 | 800x400 mm |
| Cutting tilting angle/切割角度 | 90° |
| Cutting depth at 90°/切割深度 | 150 cm |
| Cutting depth at 45°/切割深度 | NA |
| Sliding table adjustable/滑台导轨 | NA |
| Sliding table guide rail/滑轨导轨 | NA |
| Package Size/包装尺寸 | 1300x840x110 mm |
| Net/Gross Weight/净重 | 230V: 103 / 115kg |
| Net/Gross Weight/净重 | 400V: 103 / 115 kg |
| Container Load 20GP/集装箱 | 33 |
| Container Load 40GP/集装箱 | 69 |
| Container Load 40HP/集装箱 | 92 |

PT200A / PT250A

204 mm

252 mm

120



SPRING TABLE CARTRIDGE & TABLE EXTENSION



Angle adjustable fence
角度可调的挡料板

8" X 5"/10" X 5" PLANER THICKNESSER


- Combination bench top jointer and planer provides a 2in1 machine to maximize work space.
- Powerful 2HP motor provides various cutting applications.
- Two high speed steel knives for precise, smooth cuts.
- Precision adjustment knobs.
- 组合式平刨和压刨，2合一的产品，节省工作空间
- 强大的2马力的电机，可满足多种切削要求
- 两个高速钢刀片提供精确和平滑的切面
- 切削高度可调



Technical Data/技术参数

| Model 型号 | Specification 规格 | | Surface Planing 平面 | | | | Thicknessing 压刨 | | | | Packaging Data 包装数据 | | | | |
|-------------|---------------------|--------------------|-----------------------|----------------|-------------|---------------|--------------------|-------------------|----------------------|--------------------|------------------------|--------------|---------------------|--------------------|-----------------------|
| | Motor 马达功率 | Dimensions 机器尺寸 | Cutter block 锯刀转速 | No. of 刀片数量 | Stock 深度 | Stock 最大切削 | Clearance 加工高度 | Clearance 加工高度 | Thickening 下工作台尺寸 | Thickening 加工高度 | Stock 最大切削 | Feed 送料速度 | Carton size 包装尺寸 | N.W./G.W. 净重/毛重 | Container load 集装箱 |
| PT200A | 1500 | 753x484x60 | 9000 | 2 | 740x210 | 204 | 2.5 | 270x204 | 5-120 | 204 | 2 | 4 | 850x435x470 | 27.0 / 30.0 | 40 GP / 40 HP |
| PT250A | 1500 | 854x494x63 | 9000 | 2 | 800x203 | 252 | 2.5 | 270x203 | 5-120 | 252 | 2 | 4 | 1015x500x510 | 30.0 / 34.5 | 108 / 228 |

VSM-50

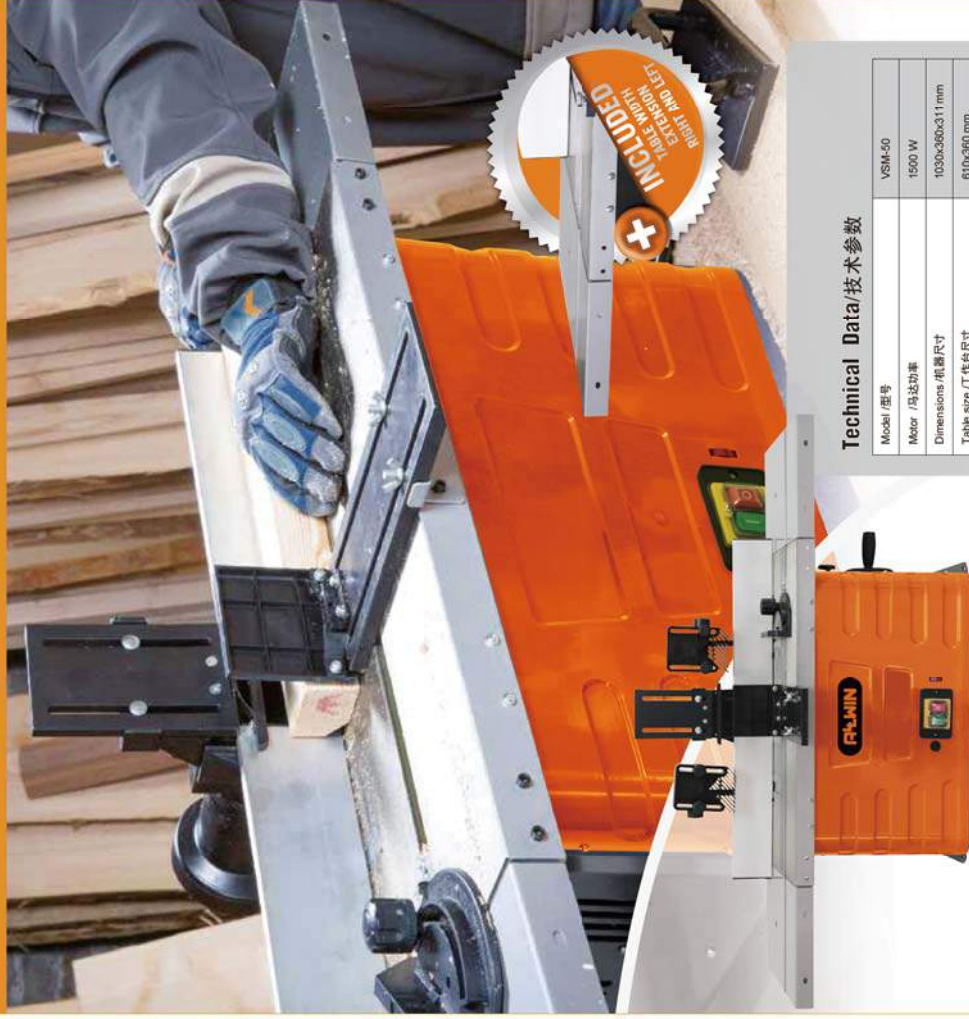

10"VERTICAL SPINDLE MOULDER

- Variable speed control 11500 to 24000 rpm
- Use router cutters shanks dia. 6/8/12mm
- Adjustable spindle height 0 to 40mm
- Motor power 2HP
- 2 x table width extensions as standard
- 转速可以在11500到24000RPM 调节
- 可使用6/8/12mm的铣刀头
- 可调节的转轴高度从0到40mm
- 马达功率2马力
- 标配双延伸工作台



Technical Data/技术参数

| | |
|---|-----------------|
| Model / 型号 | VSM-50 |
| Motor / 马达功率 | 1500 W |
| Dimensions / 机身尺寸 | 1030x360x311 mm |
| Table size / 工作台尺寸 | 610x360 mm |
| Extension single table size / 单个延伸工作台尺寸 | 210x360 mm |
| Speed / 转速 | 11500~24000 RPM |
| Router Cutters Shanks Dia. / 铣刀杆径 | 6/8/12 mm |
| Max.Cutter Block diameter / 最大铣刀直径 | 50 mm |
| Spindle Height / 主轴升降高度 | 0~40 mm |
| Table Inserts / 桌垫规格 | 32x750 mm |
| Carton Size / 包装尺寸 | 670x350x390 mm |
| Net/Gross Weight / 毛净重 | 21 / 23 kg |
| Container Load 20GP / 净吨数 | 192 |
| Container Load 40GP / 净吨数 | 408 |
| Container Load 40HP / 净吨数 | 408 |

SDM-2000M

230mm

85

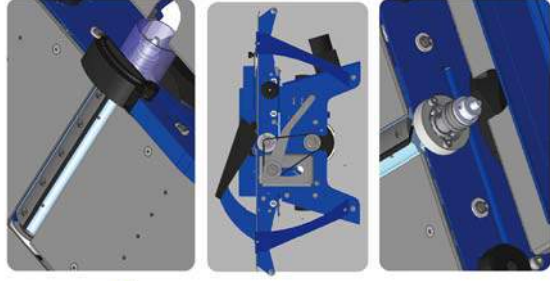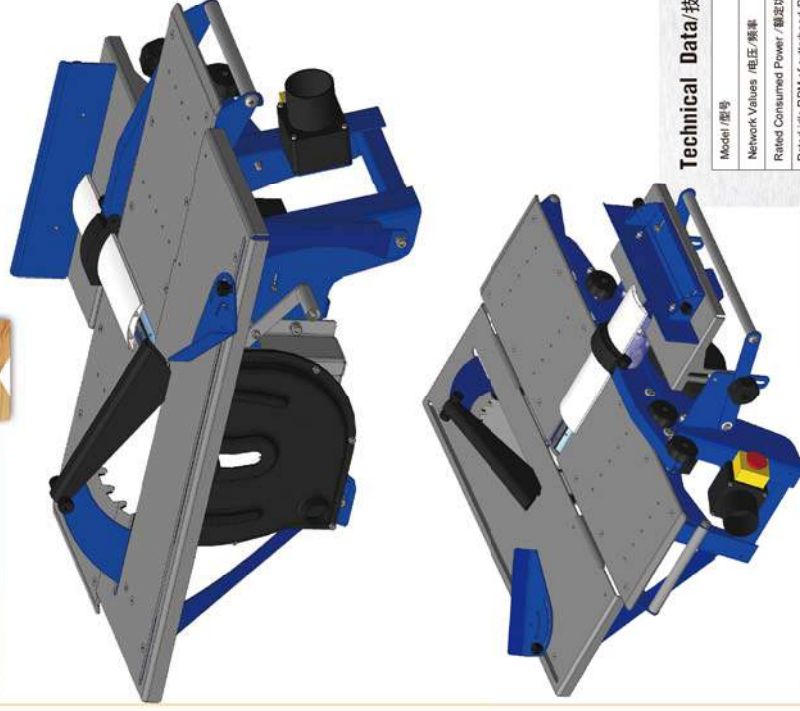

Technical Data/技术参数

| | |
|--|------------------|
| Model / 型号 | SDM-2000M |
| Network Values / 电压/频率 | 230V/50Hz |
| Rated Consumed Power / 额定功率 | 2000W |
| Rated Idle RPM of cutterhead / Saw Blade and Disc Cutter 锯刀/锯片和圆盘铣刀的额定转速 | 7700 / 2650rpm-1 |
| Max. Planing / Thickening Width / 最大刨削厚度 | 230mm |
| Range of Cutting Depth / 切削深度范围 | 0-85mm |
| Range of Cutting/Planing Angles / 刨削/磨削角度范围 | 0-45° |
| Range of Cross-Cutting Angles / 横切角度范围 | -45-45° |
| Range of Planing Depth Per Pass / 刨削深度范围 | 0-3mm |
| Cutting Table Size / 切削工作台尺寸 | 732x456mm |
| Table Size at Planing / 刨削工作台尺寸 | 760x247mm |
| Saw Blade / 锯片尺寸 | 250mmmm |
| Carton Size / 包装尺寸 | 888x252x445mm |
| Net/Gross Weight / 毛净重 | 60/66kg |
| Container Load 20GP / 净吨数 | 105 |
| Container Load 40GP / 净吨数 | 220 |
| Container Load 40HP / 净吨数 | 225 |

PRODUCT INTRODUCTION

This machine have unique structure of the work table, it consists of three main parts: cutting, feeding and infeed planer tables.

We paid special attention to security in this machine - While cutting the planing function is blocked and vice versa.

这款机器有独特结构的工作台，它由三个部分组成：台锯工作台、压刨工作台、铣床工作台。

我们特别关注这款机器的安全性能：当使用切削功能，压刨功能将会受阻反之亦然。

FUNCTIONS:
Cutting at different angles, planing, drilling, milling with disc and end cutters, rebating.

功能：不同角度切削，刨，钻孔，铣，开槽口。